


# FOOT BELLY REINFORCEMENT KIT INSTRUCTIONS


Materials Needed	Procedure Overview
<ul style="list-style-type: none"><li>• Phillips head screwdriver</li><li>• 7/16" (11 mm) or adjustable wrench</li></ul>	<ul style="list-style-type: none"><li>• Remove the foot belly cover assembly</li><li>• Remove the rectangular metal plate</li><li>• Install triangular brace with new fasteners</li><li>• Re-install foot belly cover assembly</li></ul>

## Procedure


1. Using a Phillips head screwdriver, remove the seven fasteners that hold the foot belly cover assembly in place. Discard these fasteners. Remove the foot belly cover assembly and set aside. It will be reinstalled in step 4. See illustration A.

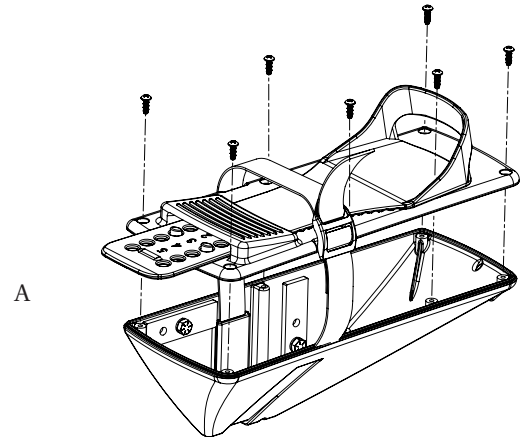


2. Using a 7/16" wrench, remove the hex screw and washer that holds the vertical rectangular metal plate in place on the foot belly. Discard the metal plate. See illustration B.

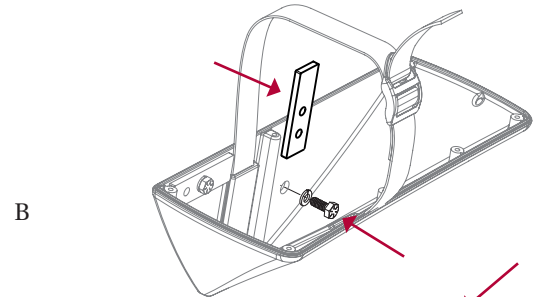

3. Install the triangular brace as shown and reinstall the hex screw and washer. Tighten fully. See illustration C.

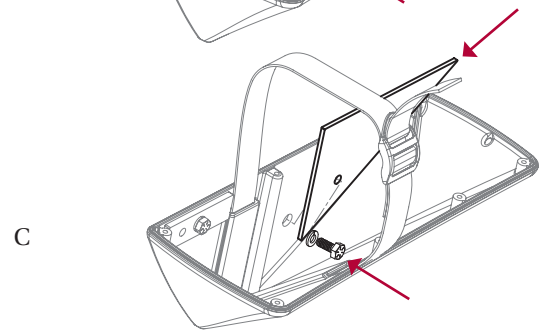

4. Reinstall the foot belly cover assembly with the seven new 1/2" fasteners. See illustration D.

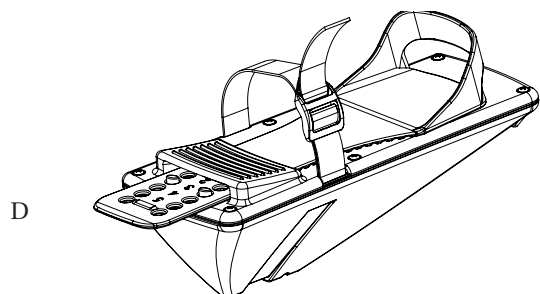

5. Repeat for the other side.